

String Box Selection Guide

Type	Total Modules	Maximum Isolator capacity (16A to 38A)				Maximum Isolator capacity (40A to 65A)				DC SPD
		2P	4P	6P	8P	2P	4P	6P	8P	4 Module
E-04W	4	1	1	0	0	1	1	0	0	1
E-06W	6	1	1	0	0	1	1	0	0	1
E-08W	8	2	2	1	1	2	2	0	0	2
E-12W	12	3	3	1	1	3	3	1	1	3
E-18W	18	5	5	2	2	4	4	2	2	4
E-24W	24	6	6	2	2	6	6	2	2	6
E-36W	36	9	9	3	3	9	9	3	3	9
E-48W	48	12	12	4	4	12	12	4	4	12


1. Due to the difference in frame size, isolators of frame size 1 (16A to 38A) and frame size 2 (40A to 65A) cannot be mounted on the same DIN rail.
2. DIN rail mounts must be reversed for suitable installation of isolators rated 40A to 65A due to increased depth.

Number of modules


Current Rating (A)	2 Pole Isolator	4 Pole Isolator	6 Pole Isolator	8 Pole Isolator
16 to 38	3.33	3.33	6.67	6.67
40 to 65	4.00	4.00	8.06	8.06
DC SPD	4.00			

Frame size 1

2 and 4 Pole Isolator
16 to 38 A




6 and 8 Pole Isolator
16 to 38 A

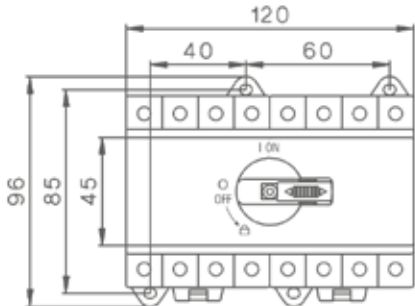

Frame size 2

2 and 4 Pole Isolator
40 to 65 A



6 and 8 Pole Isolator
40 to 65 A

